


ProductSpecifications



Field-Configurable Patch Panels

KEY FEATURES

- Meets EIA/ECA-310-E 19 in mounting standards
- Compatible with Signamax Keystone Modules to accommodate a multitude of applications
- Angled design eliminates the need for cable management panels saving space
- Replaceable die
- Wall-Mount are available with an 89D bracket for easier access to termination

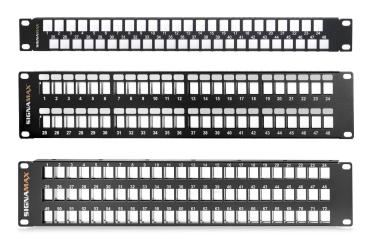



| Straight Panels | |
|-----------------|--|
| PART NUMBER | DESCRIPTION |
| 24U-HDMMP | 24-Port Field-Configurable Patch Panel, 1U |
| 48U-HDMMP | 48-Port Field-Configurable Patch Panel, 2U |
| 72U-HDMMP | 72-Port Field-Configurable Patch Panel, 2U |
| 48U-HDMMP-1R | 48-Port Field-Configurable Patch Panel, 1U |

| Straight Panels | |
|-----------------|---|
| PART NUMBER | DESCRIPTION |
| 24U-HDMMP-A | 24-Port Angled Field-Configurable Patch Panel, 1U |
| 48U-HDMMP-A | 48-Port Angled Field-Configurable Patch Panel, 2U |
| 72U-HDMMP-A | 72-Port Angled Field-Configurable Patch Panel, 1U |

| Wall-Mount Panels | |
|-------------------|---|
| PART NUMBER | DESCRIPTION |
| 12U-M89 | 12-Port Wall-Mount Mini Patch Panel w/89D Bracket |



SPECIFICATIONS

DIMENSIONS

Wall-Mount: 2.38" D x 2.06" W x 10.0" H (60.5 mm x 52.3 mm x 254 mm)

Straight/Angled

Depth

Straight Panel: CM Bar Installed: 6.0" (153 mm) / Uninstalled: 1.5" (38 mm)

Angled Panel: 4.0" (102 mm)

Height:

1 RMU: 1.75" (44.45 mm) **2 RMU:** 3.50" (88.90 mm)

Jack Opening: 1.21/1.67" D x 0.58" W x 1.02" H (30.8/42.4 x 14.6 x 25.8 mm)

CONSTRUCTION

Panel: Steel with corrosive resistant Black finish; rear nickel plated

89D Bracket: Thermoplastic

ENVIRONMENTAL CONDITIONS

Operating & Storage Temperature: -40 to 185°F (-40 to 85°C)

Operating RH: 93% (non-condensing)

COMPLIANCE

CEA310E

WARRANTY

5 - Year Limited Component

PSS-OFPP B-6-23